


## TUFOOD® FAT FORM

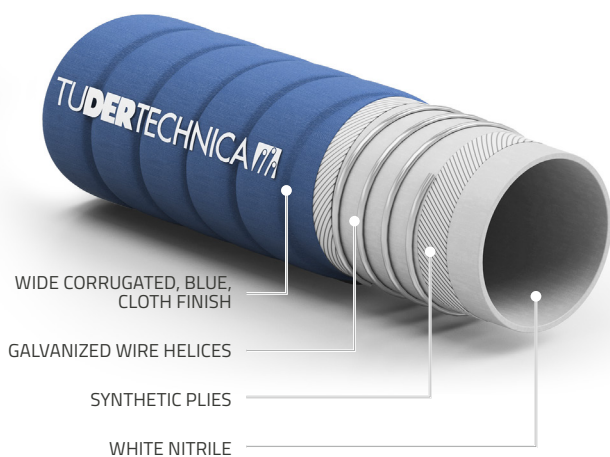

### TECHNICAL CHARACTERISTICS

**Temperature range :** -25°C / +80°C ( -13°F / +176°F )  
**Norm :** ISO 1307 for dimensional tolerances

Suction and delivery hose suitable for fatty and non-fatty food products.

### DESCRIPTION

#### Tube

NBR, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.2600, BFR recommendation XXI cat 2, DM 21.03.73 e seguenti, EUROPEAN REGLEMENT 1935/2004/CE, JAPAN-Ministry of Health and Welfare Notice No.370,1959 and No.201,2006, 3A Sanitary Standard Class II

#### Reinforcement

synthetic plies, galvanized wire helices

#### Cover

wide corrugated, blue, cloth finish. Abrasion, ageing and ozone resistant

#### Sterilization

refer to guidelines for cleaning and sanitizing on Tudertechnica website

#### Marking

TUDERTECHNICA TUFOOD® FAT



Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
25	1,00	-	-	0,9	13	10	150	30	450	0,81	0,54	70	2,76
32	1,25	-	-	0,9	13	10	150	30	450	0,98	0,66	75	2,95
38	1,50	-	-	0,9	13	10	150	30	450	1,27	0,85	80	3,15
51	2,00	-	-	0,9	13	10	150	30	450	1,97	1,32	100	3,94
63,5	2,50	-	-	0,9	13	10	150	30	450	2,41	1,61	130	5,12
76	3,00	-	-	0,9	13	10	150	30	450	3,03	2,03	150	5,91
102	4,00	-	-	0,9	13	10	150	30	450	4,63	3,10	250	9,84

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request.