TUDERTECHNICA
excellence in design and manufacture of specialty hoses

TUSIL® BRIGHT D

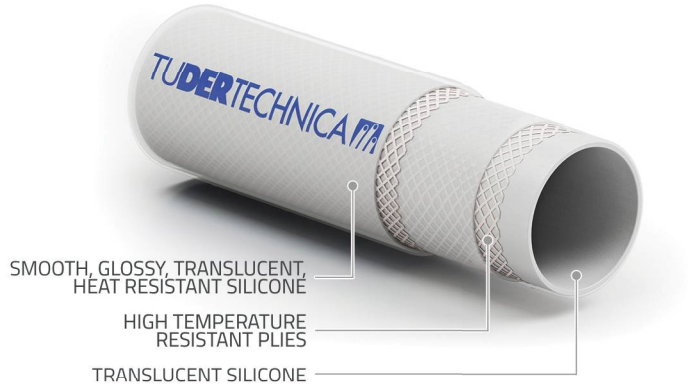

Delivery hose suitable for cosmetic, pharmaceutical and food products. Meets migration test according to BfR Recommendation XV & XXI Cat. 2. Not intended for use as an implant material. Not suitable for blood or human fluids.

TECHNICAL CHARACTERISTICS

Temperature range : -60°C / +200°C (-76°F / +392°F)
Norm : ISO 1307 for dimensional tolerances

FDA | BfR | DM 21/03/1973 | MHLW 1959-2006 | CE 1935/2004 | 3A | REACH PHTHALATES FREE | USP CLASS VI | ISO 10993 | EU PHARMA 3.1.9

DESCRIPTION

Tube
silicone, translucent, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA CFR 21 PART 177.2600, USP XXXII class VI requirements, European Pharmacopoeia 3.1.9 Ed. VII 2011, ISO 10993 Sections 5,10,11:2009, BfR Recommendation XV & XXI Cat. 2, European Reglement 1935/2004/CE, DM 21/03/1973 e seguenti, Japan Ministry of Health and Welfare Notice No.370,1959, No.201,2006 and revision 2012, 3A Sanitary Standard Class II

Reinforcement
high temperature resistant plies

Cover
smooth, silicone, translucent, heat, ageing, ozone and abrasion resistant, glossy cover

Sterilization
refer to guidelines for cleaning and sanitizing on Tudertechnica website

Marking
TUDERTECHNICA TUSIL® BRIGHT

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
10	0,39	22	0,87	-	-	16	250	48	750	0,35	0,23	-	-
13	0,50	25	1,00	-	-	15	225	45	675	0,41	0,27	-	-
16	0,63	28	1,10	-	-	14	210	42	630	0,48	0,32	-	-
19	0,75	31	1,22	-	-	13	195	39	585	0,55	0,37	-	-
25	1,00	37	1,46	-	-	10	150	30	450	0,68	0,46	-	-
32	1,25	44	1,73	-	-	8	120	24	360	0,83	0,56	-	-
38	1,50	50	1,97	-	-	7	105	21	315	0,96	0,64	-	-
51	2,00	63	2,48	-	-	6	90	18	270	1,24	0,83	-	-
63,5	2,50	76,5	3,01	-	-	5	75	15	225	1,68	1,13	-	-
76	3,00	89	3,50	-	-	4	60	12	180	1,98	1,33	-	-
102	4,00	115	4,53	-	-	3	45	9	135	2,61	1,75	-	-

Data refer to ambient temperature (20°C); we recommend a reduction of 20% working pressure for every 100°C of temperature increase. Other diameters, wall thickness and pressure only on specific request.
We reserve the right to supply in random lengths shorter than 40mt or 20mt.